MUNK
Sicherheit. Made in Germany.

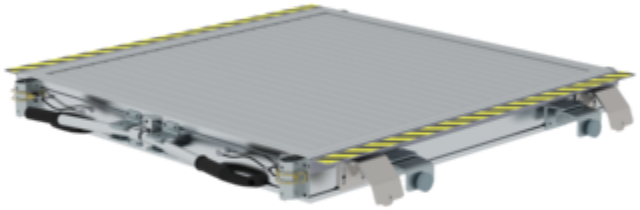

Order no.: 331037

Mobile track platform

Platform covering

Aluminium corrugated | GRP grating

Specification

Top surface depth 1.26 m	Top surface width 1.33 m	Step/Platform surface Aluminium corrugated	Non-slip class R11	Max. load capacity 300 kg
Material Aluminium	Transport dimensions (plus packaging) 1550 x 1100 x 132 mm, 52 kg	Business division MUNK Günzburger Steigtechnik	Order no. 331037	

Facts

- Aluminium work platform
- Adaptable to different track types thanks to adjustable supports
- Suitable for main track types S49, S54 and 60E
- Anti-slip platform covering in aluminium ribbed R11
- Easy and safe moving of the track platform thanks to automatic brake and double operating lever
- Robust and maintenance-free castors
- Flush transition to the track area with warning marking

- Push-fit railing with knee rail and toe board available as accessories for end faces
- Optional connecting piece means it can be coupled with other track platforms without gaps, making it possible to cover complete track pits
- Maximum load: 300 kg

Scope of supply

- Platform: 1 x
- Instructions for use and operation: 1 x

More product pictures











Added value

We reserve the right to make technical changes and price changes.

Can the rail platform be used on different rail systems?

Yes. The rail platform is designed for the common main rail types S49, S54 and 60E.
Thanks to adjustable supports, the platform can be precisely adapted to the respective rail profile. This ensures that the platform sits securely and stably on the rail. No additional substructure or temporary solutions are required, allowing safe work directly in the track area.

Is the rail platform slip-resistant and suitable for safe working?

Yes. The working surface is equipped with anti-slip properties.
It provides secure footing even in wet conditions or in the presence of dirt or oily residues. The flush transition to the track area with warning markings makes access easier and reduces the risk of tripping when stepping on or off the platform.

What is the maximum load capacity of the rail platform?

The maximum load capacity is 300 kg.
This allows the rail platform to safely support one person including tools, materials or small equipment. The high load capacity makes it particularly suitable for maintenance, inspection and servicing work in the rail and industrial sectors.

Can the rail platform be moved easily?

Yes. The rail platform is mobile and equipped with robust, maintenance-free castors.
An automatic brake system combined with a dual operating lever ensures controlled movement and reliable locking during use. This allows the platform to be positioned quickly without compromising stability.

Can the rail platform be extended or combined with other platforms?

Yes. With an optional connection element, multiple rail platforms can be joined together seamlessly. This makes it possible to safely cover larger working areas or even complete track pits. For additional safety, a plug-in guardrail with knee rail and toe board is available as an accessory for the end sides.

What applications is the rail platform particularly suitable for?

The mobile rail platform has been developed for professional use in rail, industrial and maintenance environments.
The combination of industrial-grade quality, 300 kg load capacity, slip-resistant platform and mobile design makes it ideal for tasks where safety, efficiency and flexibility in the track area are essential.

MUNK
Sicherheit. Made in Germany.

Corporate certifications

Standards for quality and sustainability

Nachhaltigkeit
EcoVadis
sustainable supply management
CSR-Rating in Silber 2022