


Order no.: 986063

## Railing toe board

Length [mm]

3500

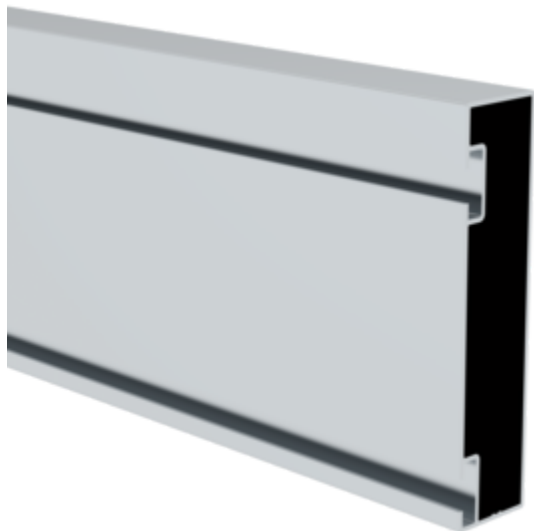

### Specification

Length <b>3.5 m</b>	Weight <b>3.1 kg</b>	Transport dimensions <b>3500 x 25 x 110 mm, 3.6 kg</b>	Predecessor product <b>986062</b>	Business division <b>MUNK Günzburger Steigtechnik</b>
Order no. <b>986063</b>	Price <b>€ 93.00</b>			

### Facts

- Universal use
- Simple to assemble
- Stable design
- Attractive design
- Our connecting elements and bars with an external diameter of 40 mm for system railings can be installed in all design variants. In the standard version, the connecting parts are made of galvanised steel, which are suitable for indoor use

- A stainless steel design is also available at a surcharge, which is recommended for outdoor use. Surface treatment such as powder coating can be carried out in all conventional RAL colours on request.
- All connections are also available in stainless steel on request

### **Scope of supply**

- Installation material: 1 x
- Assembly instructions: 1 x


### **Information on sustainability criteria**

---

- Corporate certification: ISO 9001
- Corporate certification: ISO 14001
- Corporate certification: EN 1090
- Corporate certification: EcoVadis
- RoHS
- REACH
- The MUNK Group complies with a Code of Conduct
- The Supply Chain Act does not apply due to our size
- The materials used are listed in the technical specification
- Resource-saving production: own photovoltaic systems
- Energy-efficient consumption during production: LED lighting
- Repairability, durability and quality: 15-year warranty on series products made in Germany
- Recyclability: Our products are mostly made of aluminium, steel or wood and can be fed directly into the recycling process.
- Socially acceptable working conditions in production: fair wages, gender equality
- Economical and recyclable packaging: no use of polystyrene, predominantly use of wood and cardboard, small amounts of plastic
- No health hazards for the users

## More product pictures

---



## Added value

---

### Product configurator

Configuring, enquiring about and ordering individual products could not be easier with our [product configurator](#) for stairs, bridging steps and mobile platform stairs. Simply enter your required dimensions and versions step by step, and a rotating 3D model will appear in real time. To save your configuration and request a quotation requires a login which will be set up for you by our Sales team.



### Safety railing

- Railings and handrails on both sides ensure a high level of safety at work
- Fixed size or telescopic safety door



### Modular kit system

- Individually and cost-efficiently combinable for the respective requirement
- Platform heights from 1.25 to 3.0 m
- Three different platform lengths can be selected

### Ascent

- Non-slip designs for secure footing
- All kinds of different materials can be selected with non-slip classes from R 9 to R 13 – suitable for the specific application purpose



## Modular walkway systems

- For a wide range of indoor applications in production, warehouses, as access to machines, as a walkway along building walls or as practical access for de-icing commercial vehicles in the winter months
- Thanks to innovative modular construction, walkway systems can be assembled conveniently, cost-effectively and yet precisely to meet individual requirements
- The platform height of the walkway systems can be individually determined between 1.25 and 3.0 metres. The desired total length is achieved by way of combining three different walkway lengths
- The modules can be easily assembled using pre-assembled modules, securely connected to one another and fastened to the underlying surface using foot brackets
- The maintenance-free modules are manufactured as a stable, corrosion-resistant aluminium construction with a supporting frame.
- Maximum load: 1.5 kN / m<sup>2</sup>, step load 150 kg, total load 300 kg
- Access to the walkway conveniently via stairs 45° with handrails on both sides and automatically closing safety door.
- The delivery from the factory is made in pre-assembled modules for quick and simple assembly in accordance with the enclosed assembly instructions

## Note

When assembling a walkway, only modules with the same platform height can be combined. Please contact us if you need different platform heights on a walkway system. This also applies if you need walkway systems for outdoor use, as they are primarily designed for indoor use (with the exception of de-icing systems).

## Corporate certifications

---

on sustainability criteria



Management System  
ISO 9001:2015  
ISO 14001:2015  
[www.tuv.com](http://www.tuv.com)  
ID 9108612548



**Nachhaltigkeit**  
**EcoVadis**  
sustainable supply management  
CSR-Rating in Silber 2022

