



Order no.: 052705

## Folding platform ladder with narrow undercarriage



Number of steps

- 5
- 6
- 7
- 8
- 10
- 12
- 14

### Specification

Working height <b>3.15 m</b>	Step design <b>Steps</b>	Number of steps/rungs <b>5 steps</b>	Platform included as step <b>Yes</b>	Platform height <b>1.15 m</b>
Platform length <b>650 mm</b>	Platform width <b>600 mm</b>	Step depth <b>80 mm</b>	Step/Rung distance <b>235 mm</b>	Height <b>2.19 m</b>
Total length folded <b>2.75 m</b>	Base spread <b>1.4 m</b>	Inclination <b>70 °</b>	Outer width <b>650 mm</b>	Stabiliser width <b>850 mm</b>
Depth of side-rails <b>73 mm</b>	Depth of side-rails, support <b>58 mm</b>	Max. load capacity <b>150 kg</b>	Design type <b>Single-sided access   Freestanding   With chassis beam</b>	Ballast weight <b>30 kg</b>
Weight incl. ballast weight <b>67 kg</b>	Weight <b>66.5 kg</b>	Transport dimensions <b>2780 x 760 x 220 mm, 29 kg</b>	Transport dimensions 2 <b>860 x 220 x 262 mm, 37.5 kg</b>	Business division <b>MUNK Günzburger Steigtechnik</b>
Order no. <b>052705</b>	Price <b>€ 2,313.00</b>			

### Facts

- Platform ladder made of aluminium

- Stable rectangular tube side-rails
- Grooved steps with a depth of 80 mm
- Spacious platform with grooves for secure footing (650 x 600 mm)
- 4-fold edged step-to-side-rail connection
- With handrail on both sides, 3-sided, 1,000 mm high railing with knee and foot rails as well as safety rope
- Support part with narrow undercarriage and ballast weight for high stability
- Folds for compact storage thanks to sturdy steel hinges (when ballast weight is on the outside)
- Particularly suitable for narrow shelving aisles etc.
- Integrated Ø 125 mm fixed castors with locking device for quick transportation when folded out
- nivello® ladder shoes with patented 2-axis inclination technology
- Generous sized tool tray
- Outer width: 650 mm (without stabiliser)
- Step spacing: 235 mm
- Ladder inclination: 70°
- Maximum load: 150 kg

### **Scope of supply**

- Ladder: 1 x
- Instructions for use and operation: 1 x


### **Information on sustainability criteria**

---

- Corporate certification: ISO 9001
- Corporate certification: ISO 14001
- Corporate certification: EN 1090
- Corporate certification: EcoVadis

- RoHS
- REACH
- The MUNK Group complies with a Code of Conduct
- The Supply Chain Act does not apply due to our size
- The materials used are listed in the technical specification
- Resource-saving production: own photovoltaic systems
- Energy-efficient consumption during production: LED lighting
- Repairability, durability and quality: 15-year warranty on series products made in Germany
- Recyclability: Our products are mostly made of aluminium, steel or wood and can be fed directly into the recycling process.
- Socially acceptable working conditions in production: fair wages, gender equality
- Economical and recyclable packaging: no use of polystyrene, predominantly use of wood and cardboard, small amounts of plastic
- No health hazards for the users

## More product pictures

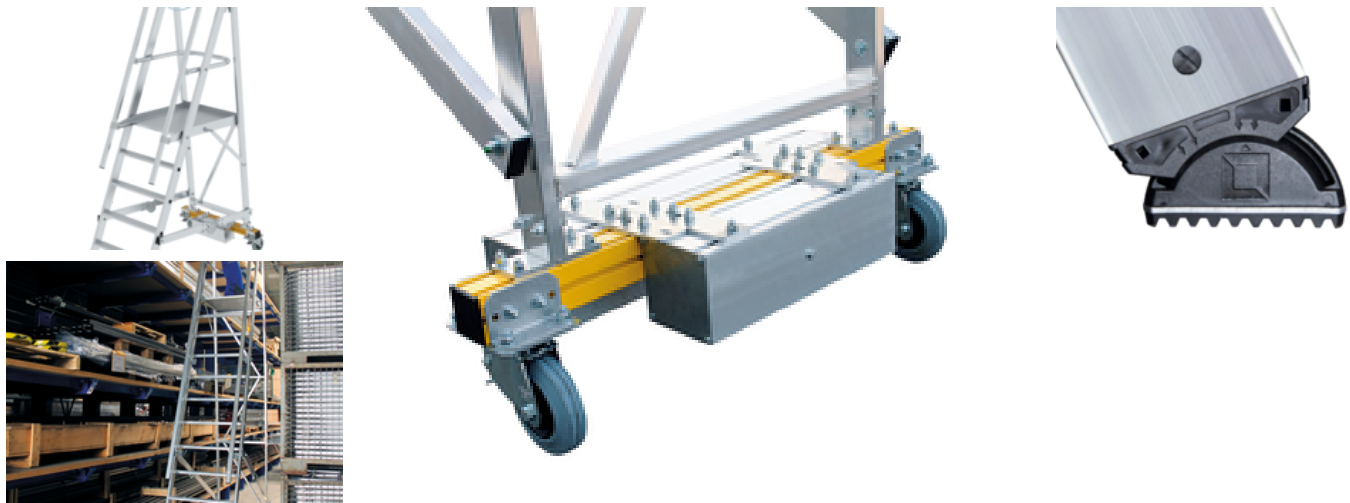

### Added value

#### Safe working

- Handrails for safe ascent and descent
- Large-format, non-slip platforms
- Conical side-rail guide for safe stance
- Railings and knee boards for safe access and stance



The movable ladder shoe sets new standards in stability

[Learn more](#)



#### Industrial grade

Stable and robust for tough everyday working life (including 4-way edging)

- Corrosion-resistant fixtures
- Use of high-quality and high-strength materials
- Versatile and practical accessories



#### Castors

- Ergonomic and comfortable handling
- Simple movement from place to place



## Certificates

---



5011053.24002 -  
Certificate Product  
Safety Type  
approved

Valid in



DIN EN 131-7:2013  
DIN EN 131-3:2018

## Corporate certifications

---

on sustainability criteria



Management System  
ISO 9001:2015  
ISO 14001:2015  
[www.tuv.com](http://www.tuv.com)  
ID 9108612548



**Nachhaltigkeit**  
**EcoVadis**  
sustainable supply management  
CSR-Rating in Silber 2022

