



Order no.: 031216

2-section multi-purpose ladder with rungs, with nivello® stabiliser.



Number of rungs

2x8

2x10

2x12

2x14

Specification

Working height 5.3 m	Step design Rungs	Number of steps/rungs 2x 8 rungs	Step/Rung height 30 mm	Step depth 30 mm
Step/Rung distance 280 mm	Ladder length as double-sided ladder 2.49 m	Base spread as double ladder 1.69 m	Inclination 70 °	Extended length 4.18 m
Length of ladder sections 2.49 m	Outer width 490 mm	Stabiliser width 930 mm	Depth of side-rails 73 mm	Width of side-rails 25 mm
Max. load capacity 150 kg	Weight 12 kg	Transport dimensions 2480 x 495 x 149 mm, 12 kg	Business division MUNK Günzburger Steigtechnik	Order no. 031216
Price € 378.00				

Facts

- Multi-purpose rung ladder made from aluminium
- Stable rectangular tube side-rails

- Rectangular rungs grooved on both sides, 30 x 30 mm
- 4-fold edged rung-to-side-rail connection
- Can be used as a step ladder, straight ladder and push-up extension ladder
- Simple height adjustment thanks to insertion hook with lift-off protection
- Corrosion-resistant guide fixtures
- nivello® ladder shoes and nivello® stabiliser (enclosed separately)
- Spreader lock with two high-strength polyester straps
- Rung distance: 280 mm
- Ladder width: 490 mm (without stabiliser)
- Maximum load: 150 kg

Scope of supply



- Ladder: 1 x
- Stabiliser (enclosed separately): 1 x
- Instructions for use and operation: 1 x

Information on sustainability criteria

- Corporate certification: ISO 9001
- Corporate certification: ISO 14001
- Corporate certification: EN 1090
- Corporate certification: EcoVadis
- RoHS
- REACH
- The MUNK Group complies with a Code of Conduct
- The Supply Chain Act does not apply due to our size
- The materials used are listed in the technical specification
- Resource-saving production: own photovoltaic systems
- Energy-efficient consumption during production: LED lighting

- Repairability, durability and quality: 15-year warranty on series products made in Germany
- Recyclability: Our products are mostly made of aluminium, steel or wood and can be fed directly into the recycling process.
- Socially acceptable working conditions in production: fair wages, gender equality
- Economical and recyclable packaging: no use of polystyrene, predominantly use of wood and cardboard, small amounts of plastic
- No health hazards for the users

More product pictures

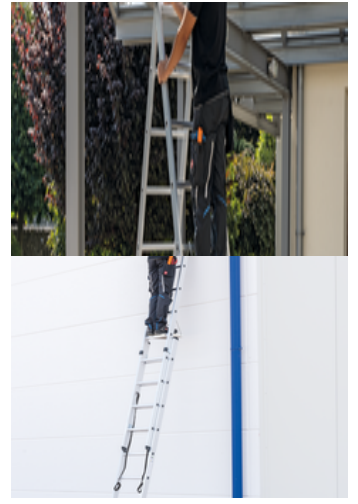

Added value

Industrial grade

Stable and robust for tough everyday working life (including 4-way edging)

- Corrosion-resistant fixtures
- Use of high-quality and high-strength materials
- Versatile and practical accessories



Flexibility

- Universal and versatile use
- Compact size for transport and storage
- Upper ladder can also be used individually (up to 3.0 m)



The movable ladder shoe sets new standards in stability

[Learn more](#)



Easy handling

- Insertion hooks with lift-off protection or automatically locking steel hinges
- Optimised guidance, thanks to guide fixtures with high-strength plastic coating

Large range of accessories

- The right equipment for every application
- Practical and makes work easier
- Suitable for universal use on Günzburger Steigtechnik ladders



nivello® stabiliser

Extra safe, standards-compliant ascent for straight ladders over 3.0 m

- Extra wide stabiliser for even greater stability
- nivello® ladder shoes with patented 2-axis inclination technology, integrated work angle check and exchangeable foot plates
- Individually available as spare part




roll-bar retrofit kit

- Rolling instead of carrying: ergonomic and convenient handling
- Simple, no-drill mounting on stabilisers
- User-friendly operation without bending down




Note: Working heights

- National regulations (e.g. TRBS 2121 Part 2 in Germany) must be complied with with regard to the maximum working height when using the ladder as a workstation.
- Information on [TRBS 2121 Part 2](#) has been summarised on our Service page
- Read our [tips and tricks](#) on how to calculate [working height](#)




Certificates



18KFP0038-02 -
Test Certificate
"Bauart geprüft"

Valid in



DIN EN 131-
3:2007
PAK-
ANFORDERUNG
FÜR GS -
ABSCHNITT
3.1(PAH-
REQUIREMENT
FOR GS - CL. 3.1)
AFPS GS 2014:01
PAK
EK5/AK1 17-
03:2017
DIN EN 131-1:2016
DIN EN 131-2:2017

Corporate certifications

on sustainability criteria



Management System
ISO 9001:2015
ISO 14001:2015
www.tuv.com
ID 9108612548

