MUNK
Sicherheit. Made in Germany.



Order no.: 021714

2-section rung rope-extension ladder with standard stabiliser

Number of rungs

2x14 | 2x15 | 2x16 | 2x17 | 2x18 | 2x19 | 2x20 | 2x21

Specification

Working height 7.77 m	Step design Rungs	Number of steps/rungs 2x 14 rungs	Step/Rung height 30 mm	Step depth 30 mm
Step/Rung distance 280 mm	Retracted length 4.18 m	Extended length 7.22 m	Outer width 420 mm	Stabiliser width 1.2 m
Depth of side-rails 73 mm	Width of side-rails 25 mm	Design type To lean against | 2-part	Transport dimensions (plus packaging) 4125 x 445 x 169 mm, 22.2 kg	Business division MUNK Günzburger Steigtechnik
Order no. 021714				

Facts

- Rung rope-extension ladder made of aluminium
- Stable rectangular tube side-rails
- Rectangular rungs grooved on both sides, 30 x 30 mm, Slip resistance class R10
- 4-fold edged rung-to-side-rail connection

We reserve the right to make technical changes and price changes.

- Convenient height adjustment from rung to rung thanks to two pulleys with plastic cable
- Upper ladder with wall wheels
- Corrosion-resistant guide fixtures with sliding guides
- Rung distance: 280 mm
- Ladder width: 420 mm (without stabiliser)
- Maximum load: 150 kg
- Standard stabiliser with non-slip ladder shoes with optimum width for the selected product. Ensures maximum stability and safe ascent for straight ladders over 3.0 m. The stabiliser is enclosed separately and is screwed to the lower end of the rail in two places
- Note: In accordance with standards, the attached push-up extension ladder section cannot be separated from the ladder with lengths over 3.0 m

Scope of supply

- Ladder: 1 x
- Stabiliser (enclosed separately): 1 x
- Instructions for use and operation: 1 x

More product pictures









Added value

Industrial grade

Stable and robust for tough everyday working life (including 4-way edging)

- Corrosion-resistant fixtures
- Use of high-quality and high-strength materials
- Versatile and practical accessories

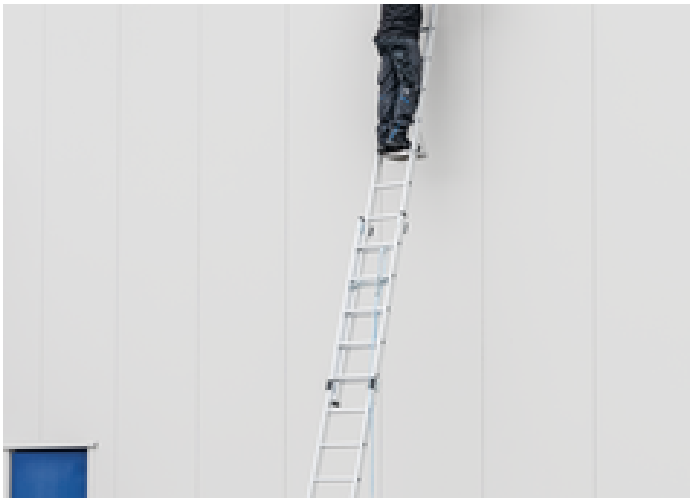

Optimum and smooth operation, thanks to easily accessible elements

- Simple height adjustment from rung to rung or from step to step
- Wall wheels on the upper part (from 14 rungs or more)
- Fittings with sliding guides
- Smooth-running rope pulley



Large range of accessories

- The right equipment for every application
- Practical and makes work easier
- Suitable for universal use on Günzburger Steigtechnik ladders



Standard stabiliser

Safe, standards-compliant ascent for straight ladders over 3.0 m

- Different stabiliser widths, suitable for the selected ladder length
- Non-slip ladder shoes
- Individually available as spare part



roll-bar retrofit kit

- Rolling instead of carrying: ergonomic and convenient handling
- Simple, no-drill mounting on stabilisers
- User-friendly operation without bending down



MUNK
Sicherheit. Made in Germany.

Corporate certifications

Standards for quality and sustainability

Nachhaltigkeit
EcoVadis
sustainable supply management
CSR-Rating in Silber 2022