MUNK
Sicherheit. Made in Germany.



Order no.: 111001

Scaling ladder lower section DIN EN 1147, photoluminescent

Rung covering

Glow (yellow luminescent) | Standard (red)

Specification

Rescue height 1.6 m	Intended use Rescue	Ladder length 2.7 m	Ladder length, 4 scaling ladders 8.4 m	Setting angle 70 °
Outer width 485 mm	Ladder feet Ladder shoe	Depth of side-rails 74 mm	Width of side-rails 35 mm	Step/Rung height 28 mm
Step depth 29 mm	Number of steps/rungs 9 rungs	Step/Rung distance 273 mm	Max. load capacity 216 kg	Persons max. 2
Material Aluminium	Rung covering Glow (yellow luminescent)	Transport dimensions (plus packaging) 84 x 489 x 2665 mm, 7.5 kg	Business division MUNK Rettungstechnik	Order no. 111001

Facts


- Rescue ladder compliant with DIN EN 1147
- Made of aluminium
- Secure push-fit connections with spring-loaded locking pin
- Conical side-rail guide for safe stance

- Corrosion-resistant fixtures made of galvanised steel
- Permissible load: 216 kg / 2 people
- Side-rails and rungs made of high-strength aluminium
- With yellow luminescent, heat-insulating and non-slip plastic covering
- 4-fold edged rung-to-side-rail connection
- Non-slip and replaceable ladder shoes

More product pictures





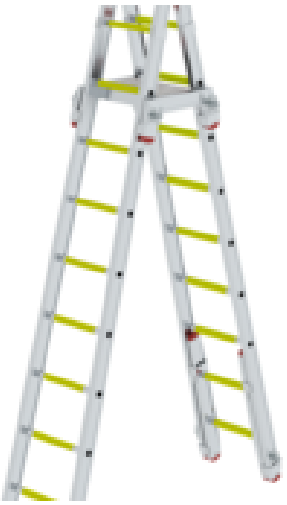





MUNK
Sicherheit. Made in Germany.

Corporate certifications

Standards for quality and sustainability

Nachhaltigkeit
EcoVadis
sustainable supply management
CSR-Rating in Silber 2022